DENVER
LEGEND

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Airport/Facility Directory (A/FD) for details involving airport lighting, navigation aids, and services. For additional symbol information refer to the Chart User's Guide.

AIRPORTS

Other than hard-surfaced runways — Seaplane Base

Hard-surfaced runways 1500 ft. to 8069 ft. in length

Hard-surfaced runways greater than 8069 ft. or some multiple runways less than 8069 ft.

Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, or VORTAC location.

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

ADDITIONAL AIRPORT INFORMATION

Private "(Pvt)" - Non-public use having emergency or landmark value

Military - Other than hard-surfaced; all military airports are identified by abbreviations AFB, NAS, AAF, etc. DoD users, for complete airport information consult DoD FLIP

Heliport Selected — Unverified — Abandoned - paved having landmark value, 3000 ft. or greater — Ultralight Flight Park Selected

Services - fuel available and field tended during normal working hours depicted by use of ticks around basic airport symbol. (Normal working hours are Mon thru Fri 10:00 A.M. to 4:00 P.M. local time.) Consult A/FD for service availability at airports with hard-surfaced runways greater than 8069 ft.

Rotating airport beacon in operation Sunset to Sunrise

AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns — FSS — NO SVFR — NAME (NAM) (PNAM) — Location Identifier — ICAO Location Indicator shown outside contiguous U.S.

Runways with Right Traffic Patterns (public use) — CT - 118.3 ★ Ⓒ ATIS 123.8 — 285 L 72 122.95 — RP 23, 34 — RP ★ Special conditions exist - see A/FD — VFR Advsy 125.0 — UNICOM — AOE — Airport of Entry

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited

CT - 118.3 - Control Tower (CT) - primary frequency

★ - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

Ⓒ - Common Traffic Advisory Frequency (CTAF)

ATIS 123.8 - Automatic Terminal Information Service

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Airport/Facility Directory

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 18,000 ft. MSL are shown on this chart. All times are local.

Class B Airspace

Class C Airspace (Mode C - see FAR 91.215/AIM.)

Class D Airspace

Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value)

Class E (sfc) Airspace

Class E Airspace with floor 700 ft. above surface

Class E Airspace with floor 1200 ft. or greater above surface that abuts Class G Airspace

2400 MSL / 4500 MSL — Differentiates floors of Class E Airspace greater than 700 ft. above surface

Class E Airspace exists at 1200' AGL unless otherwise designated as shown above.

Class E Airspace low altitude Federal Airways are indicated by center line. Intersection - Arrows are directed towards facilities which establish intersection.

Total mileage between NAVAIDs on direct Airways

Class E Airspace low altitude RNAV Routes are indicated by center line. — GRANT — T 319 — RNAV waypoint and name

Prohibited, Restricted, and Warning Areas; Canadian Advisory, Danger, and Restricted Areas

Alert Area and MOA - Military Operations Area

Special Airport Traffic Area (See FAR 93 for details.)

ADIZ - Air Defense Identification Zone

MODE C (See FAR 91.215/AIM.)

National Security Area

Terminal Radar Service Area (TRSA)

MTR - Military Training Route

COMMUNICATION BOXES

122.1R 122.6 123.6 — OAKDALE — 382 ★ OAK — 122.1R — CHICAGO CHI

Underline indicates no voice on frequency

Crosshatch indicates Shutdown status

★ - Operates less than continuous or On Request.

Ⓐ - ASOS/AWOS

Ⓗ - HIWAS

Ⓣ - TWEB

FSS radio providing voice communication — 122.1R — MIAMI

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2, 243.0 and 255.4 (Canada - 121.5, 126.7 and 243.0) are available at many FSSs and are not shown above boxes. All other frequencies are shown. Certain FSSs provide Airport Advisory Service, see A/FD.

R - Receive only

Frequencies above thin line box are remoted to NAVAID site. Other FSS frequencies providing voice communication may be available as determined by altitude and terrain. Consult Airport/Facility Directory for complete information.

RADIO AIDS TO NAVIGATION

VHF OMNI RANGE (VOR) — Non-Directional Radiobeacon (NDB)

VORTAC — VOR-DME

Other facilities, i.e., FSS Outlet, RCO, etc. — NDB - DME

OBSTRUCTIONS

1000 ft. and higher AGL — below 1000 ft. AGL

Group Obstruction

Obstruction with high-intensity lights; may operate part-time.

2049 — Elevation of the top above mean sea level

(1149) — Height above ground

UC — Under construction or reported; position and elevation unverified

NOTICE: Guy wires may extend outward from structures.

MISCELLANEOUS

Isogonic Line (2005 VALUE)

Ultralight Activity — Marine Light

Hang Glider Activity

Glider Operations

Parachute Jumping Area (See Airport/Facility Directory.)

VPXYZ — NAME (VPXYZ) — VFR Waypoints (See Airport/Facility Directory for latitude/longitude.)

TOPOGRAPHIC INFORMATION

Roads & Road Markers

Railroad

Power Transmission Line

Aerial Cable

Landmark Feature - stadium, factory, school, golf course, etc.

Outdoor Theater

Lookout Tower — 616 (Elevation Base of Tower)

Coast Guard Station

Race Track

Tank - water, oil or gas

Oil Well — Water Well

Mine or Quarry

Mountain Pass — 11823 (Elevation of Pass)

(Pass symbol does not indicate a recommended route or direction of flight and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes.)

Perennial Lake — Non-Perennial Lake — Dams — Rocks — Bridges and Viaducts

DENVER
SECTIONAL AERONAUTICAL CHART
SCALE 1:500,000

Lambert Conformal Conic Projection Standard Parallels 33°20' and 38°40'
Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

83RD EDITION EFFECTIVE 0901Z 29 JUL 2010
TO 0901Z 13 JAN 2011

Includes airspace amendments effective 29 JUL 2010
and all other aeronautical data received by 3 JUN 2010

Information on this chart will change; consolidated updates of chart changes are available every 56 days in the AIRPORT/FACILITY DIRECTORY Chart Bulletin section (online at http://aeronav.faa.gov). Also consult appropriate NOTICES TO AIRMEN (NOTAMs) and other FLIGHT INFORMATION PUBLICATIONS (FLIPs) for the latest changes.

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS, APPROVED BY:
DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

Entire area of this chart is within the Mountain Standard Time Zone +7 (+6DT) = UTC

CONTOUR INTERVAL 500 feet
Intermediate contour 250 feet

HIGHEST TERRAIN elevation is 14433 feet located at 39°07'N - 106°27'W

Spot elevation . 4254

Approximate elevation x 3200

Doubtful locations are indicated by omission of the point locator (dot or "x")

MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route and the route designator are depicted - route widths and altitudes are not shown.

Since these routes are subject to change every 56 days, and the chart is reissued every 6 months, you are cautioned and advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

Routes with a change in the alignment of the charted route centerline will be indicated in the Aeronautical Chart Bulletin of the Airport/Facility Directory.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

Published by the U.S. Department of Transportation
Federal Aviation Administration
National Aeronautical Navigation Services
http://aeronav.faa.gov

FAA Product ID: SDEN

NSN 7641014100158

NGA REF NO SECXXDENVER

EFF DATE 10210

PLOTTING DIRECT ROUTE ON NORTH/SOUTH SIDE

There are approximately two minutes of latitude overlap between the north and south sides of each sectional/WAC chart. To plot a course line from one side to the other, the user must first locate two pair of corresponding latitude tick marks, one pair on each side of the chart and follow the steps below.

STEP 1 - Draw a horizontal line (MATCH LINE) between each pair of corresponding latitude tick marks on each side of the chart just to the left or right of where your plot line crosses. (Figure 1)

STEP 2 - Decide which side of the chart has the departure or destination point closer to the edge of the chart. On that side, line up a blank piece of paper along the MATCH LINE (the paper should be completely on the chart, not extending beyond its edge).

STEP 3 - Slide the paper sideways left or right so that a side edge of the paper aligns with the departure or destination point (POINT A). Make a MARK A on edge of the paper where it meets that point.

STEP 4 - Without moving the paper, on the same edge as MARK A, extend a short line on the chart from the corner of the paper where it meets the MATCH LINE out to the edge of the chart. Make that LINE B.

STEP 5 - Turn the chart over and transfer the end of LINE B to the other side, and extend it straight to the MATCH LINE. (Figure 2)

STEP 6 - Take the sheet of paper with MARK A on it and align the (top or bottom) edge of the paper with the MATCH LINE and side edge with LINE B with the bulk of the sheet extending off of the chart. Plot a line from MARK A to the departure or destination point (POINT B).

STEP 7 - Where your plot line crosses the MATCH LINE make a MARK C. Extend a line straight from that mark to the edge of the chart.

STEP 8 - Turn the chart back over and transfer MARK C to that side and extend it to the MATCH LINE. Plot a line from MARK C to the destination. (Figure 3)

Figure 1: NORTH SIDE — Sheet of paper — POINT A — MARK A — MATCH LINE — Overlap area — LINE B

Figure 2: same latitude — Overlap area — MATCH LINE — MARK A — MARK C — LINE B (transferred) — SOUTH SIDE — POINT B

Figure 3: NORTH SIDE — POINT A — MATCH LINE — Overlap area — LINE B — MARK C (transferred)

FOR PROCUREMENT CONTACT:
FAA, National Aeronautical Navigation Services
REDIS / Distribution Team
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at http://aeronav.faa.gov
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized FAA Chart Agent

CONTROL TOWER FREQUENCIES ON DENVER SECTIONAL CHART

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF local control frequency (ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF local control frequencies are listed. An asterisk (*) indicates the part-time tower frequency is remoted to a collocated full-time FSS for use as Airport Advisory Service (AAS) during hours the tower is closed. The primary VHF and UHF ground control frequencies are listed.

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are primary arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available

"MON-FRI" indicates Monday through Friday

CONTROL TOWER	OPERATES	TWR FREQ	GND CON	ATIS	ASR/PAR
ASPEN PITKIN CO/SARDY	0700-2200	118.85 288.3	121.9	120.4	
BUCKLEY AFB	0630-2230 TUE-SAT 0800-1400 SUN-MON	121.0 291.675	121.6 275.8	119.675 259.3	
BUTTS AAF (FORT CARSON)	CONTINUOUS EXC THANKSGIVING, CHRISTMAS & NEW YEARS DAY	125.5 229.4 239.3		108.8	
CENTENNIAL	CONTINUOUS	118.9	121.8	120.3	
COLORADO SPRINGS	CONTINUOUS	119.9 360.6 (W) 133.15 335.55 (E)	121.7 348.6	125.0 254.3	
DENVER INTL	CONTINUOUS	124.3 256.85 (RWYS 08/26 & 17L/35R) 132.35 273.55 (RWY 07/25) 133.3 322.45 (RWY 17R/35L) 135.3 351.95 (RWYS 16L/34R & 16R/34L)	121.85 377.1 (RWYS 08/26, 17L/35R & 17R/35L) 127.5 379.175 (RWYS 07/25, 16L/34R & 16R/34L)	125.6 379.9 (ARR) 134.025 (DEP)	
EAGLE CO RGNL	0700-1900	119.8	121.8	135.575	
FOUR CORNERS RGNL	0600-2200	118.9 257.8	121.7	127.15	
FRONT RANGE	0700-2100	120.2	124.7	119.025	
GRAND JUNCTION RGNL	0600-2200	118.1 257.8	121.7 257.8	118.55	
PUEBLO MEML	0600-2200	119.1 257.8	121.9	125.25	
ROCKY MOUNTAIN	0600-2200	118.4 233.7	121.7	126.25	
SANTA FE	0700-2100	119.5 239.3	121.7	128.55	
USAF ACADEMY	SR SS MON-FRI 0700-1400 SAT CLSD SUN & HOL	124.15 319.25	118.125	128.525 269.375	

CLASS B, CLASS C, TRSA, AND SELECTED RADAR APPROACH CONTROL FREQUENCIES

FACILITY	FREQUENCIES	SERVICE AVAILABILITY
DENVER CLASS B	126.1 360.75 (W) 128.25 371.95 (E) 128.45 251.075 (S) 134.85 257.125 (N)	CONTINUOUS
COLORADO SPRINGS CLASS C	118.5 239.025	CONTINUOUS
BUTTS AAF (FORT CARSON) RADAR	124.0 257.875	CONTINUOUS

SPECIAL USE AIRSPACE ON DENVER SECTIONAL CHART

Unless otherwise noted altitudes are MSL and in feet. Time is local.
"TO" an altitude means "To and including."
FL - Flight Level
NO A/G - No air to ground communications
Contact nearest FSS for information

† Other times by NOTAM
NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

U.S. P-PROHIBITED, R-RESTRICTED, W-WARNING, A-ALERT, MOA-MILITARY OPERATIONS AREA

NUMBER	ALTITUDE	TIME OF USE	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
R-2601 A	TO BUT NOT INCL 12,500	0500-2400 MON-FRI †1 HR IN ADVANCE	DENVER CNTR	128.375 379.95
R-2601 B	12,500 TO BUT NOT INCL 22,500	BY NOTAM 1 HR IN ADVANCE	DENVER CNTR	128.375 379.95
R-2602	TO 1000 AGL	CONTINUOUS	DENVER CNTR	
R-5107	TO 12,000	CONTINUOUS	NO A/G	
R-6413	UNLIMITED	BY NOTAM 48 HRS IN ADVANCE	DENVER CNTR	134.5 327.8
A-260	TO 17,500	SR-SS	NO A/G	
A-639 A, B	3000 AGL TO 12,000	SR-SS MON-FRI EXC HOL SR-SS SAT-SUN BY NOTAM	NO A/G	

MOA NAME	ALTITUDE*	TIME OF USE†	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
AIRBURST A	1500 AGL	SR-SS TUE-SAT EXC 2200-0700	DENVER CNTR	128.37 379.95
AIRBURST B	500 AGL	SR-SS TUE-SAT EXC 2200-0700	DENVER CNTR	128.37 379.95
AIRBURST C	500 AGL TO BUT NOT INCL 8500	SR-SS TUE-SAT EXC 2200-0700	DENVER CNTR	128.37 379.95
LA VETA HIGH	13,000	0700-1600 MON-FRI EXC HOL	DENVER CNTR	128.375 379.95
LA VETA LOW	1500 AGL TO BUT NOT INCL 13,000	INTERMITTENT BY NOTAM	DENVER CNTR	128.375 379.95
MT DORA NORTH HIGH, WEST HIGH	11,000	BY NOTAM	ALBUQUERQUE CNTR	127.85 285.47 (E) 132.8 346.35 (W)
MT DORA NORTH LOW, WEST LOW	1500 AGL TO BUT NOT INCL 11,000	BY NOTAM	ALBUQUERQUE CNTR	127.85 285.47 (E) 132.8 346.35 (W)
PINON CANYON	100 AGL TO 10,000	INTERMITTENT BY NOTAM	DENVER CNTR	128.375 379.95
SUNNY	12,000	BY NOTAM 24 HRS IN ADV	ALBUQUERQUE CNTR	124.5 306.2

*Altitudes indicate floor of MOA. All MOAs extend to but do not include FL 180 unless otherwise indicated in tabulation or on chart.
† - Other times by DoD NOTAM.

CAUTION: Severe turbulence may occur over rugged terrain. See AIM.

ATTENTION
THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF)
The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are represented in THOUSANDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).
Example 12,500 feet 125

REGULATIONS REGARDING FLIGHTS OVER CHARTED NATIONAL PARK SERVICE AREAS, U.S. FISH AND WILDLIFE SERVICE AREAS, AND U.S. FOREST SERVICE AREAS

The landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service or U.S. Forest Service without authorization from the respective agency. Exceptions include: 1) when forced to land due to an emergency beyond the control of the operator, 2) at officially designated landing sites, or 3) on approved official business of the Federal Government.

All aircraft are requested to maintain a minimum altitude of 2,000 feet above the surface of the following: National Parks, Monuments, Seashores, Lakeshores, Recreation Areas and Scenic Riverways administered by the National Park Service, National Wildlife Refuges, Big Game Refuges, Game Ranges and Wildlife Ranges administered by the U.S. Fish and Wildlife Service, and Wilderness and Primitive Areas administered by the U.S. Forest Service. FAA Advisory Circular (AC) 91-36, "Visual Flight Rules (VFR) Flight Near Noise-Sensitive Areas," defines the surface of the highest terrain within 2,000 feet laterally of the route of flight, or the upper-most rim of a canyon or valley.

Federal regulations also prohibit airdrops by parachute or other means of persons, cargo, or objects from aircraft on lands administered by the three agencies without authorization from the respective agency. Exceptions include: 1) emergencies involving the safety of human life, or 2) threat of serious property loss.

Boundary of National Park Service areas, U.S. Fish and Wildlife Service areas, and U.S. Forest Service Wilderness and Primitive areas.

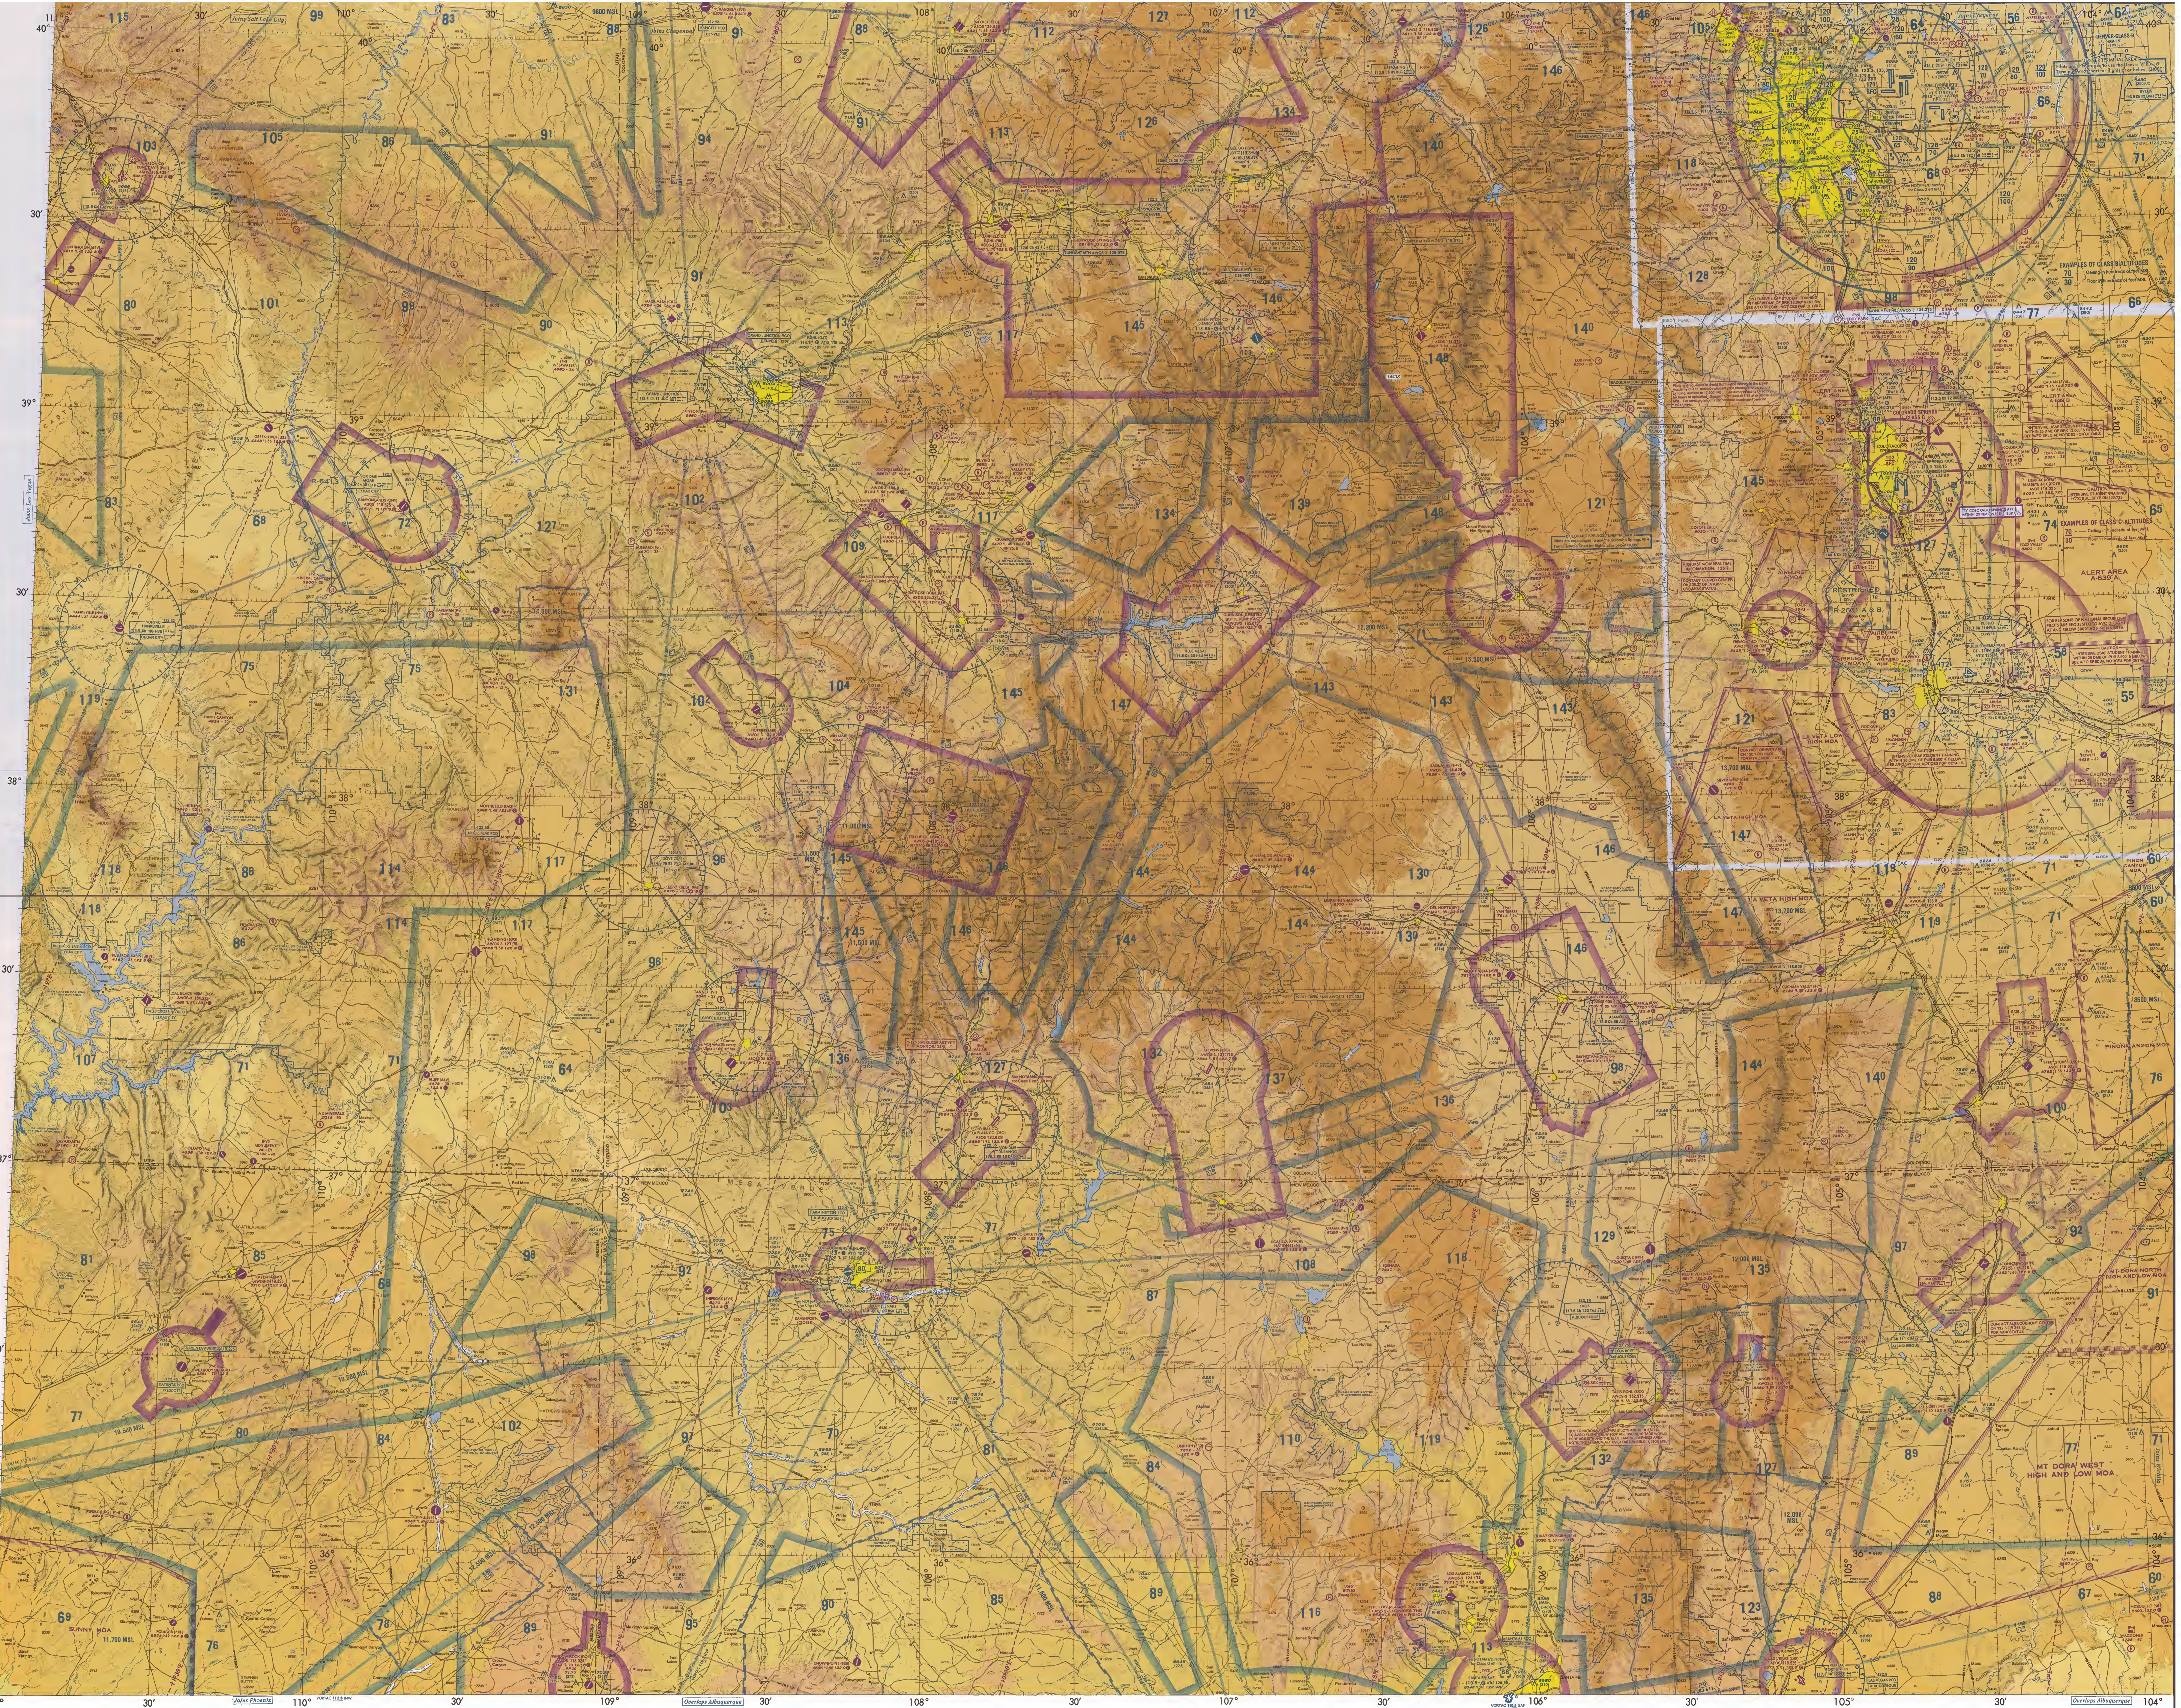

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES
All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies VHF 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-2 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

CONVERSION OF ELEVATIONS
FEET (Thousands) 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30
METERS (Thousands) 0 1 2 3 4 5 6 7 8 9

REPORTING CHART ERRORS
You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. Telephone toll free at 1-800-626-3677, or email us at 9-AMC-Aerochart@faa.gov. Frequently asked questions (FAQs) are answered on our website at http://aeronav.faa.gov. See the FAQs prior to contact via toll free number or email. Where delineation of data is required such information should be depicted clearly and accurately on a current chart, a replacement copy will be returned. Mail to: FAA, National Aeronautical Navigation Services, SSMC-4, Sta. #3424, 1305 East West Highway, Silver Spring, MD 20910-3281.

Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.